
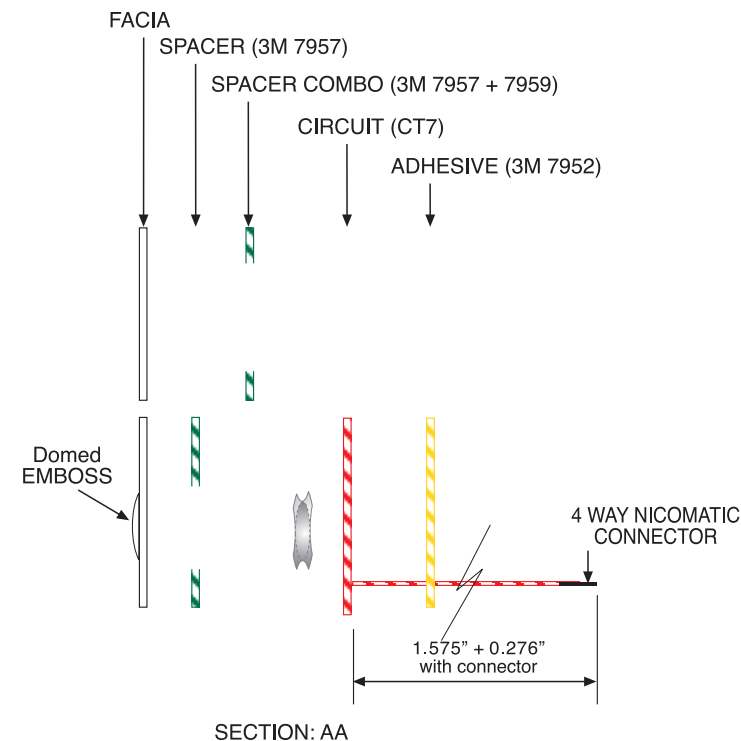




DATE	ISS	REVISIONS	DR.	CK
25/08/06	0	PRE-PRODUCTION APPROVAL	RK	
26/02/07	0	ALL DIMENSIONS CHANGED TO INCHES, DIMENSIONS ADDED.	VB	

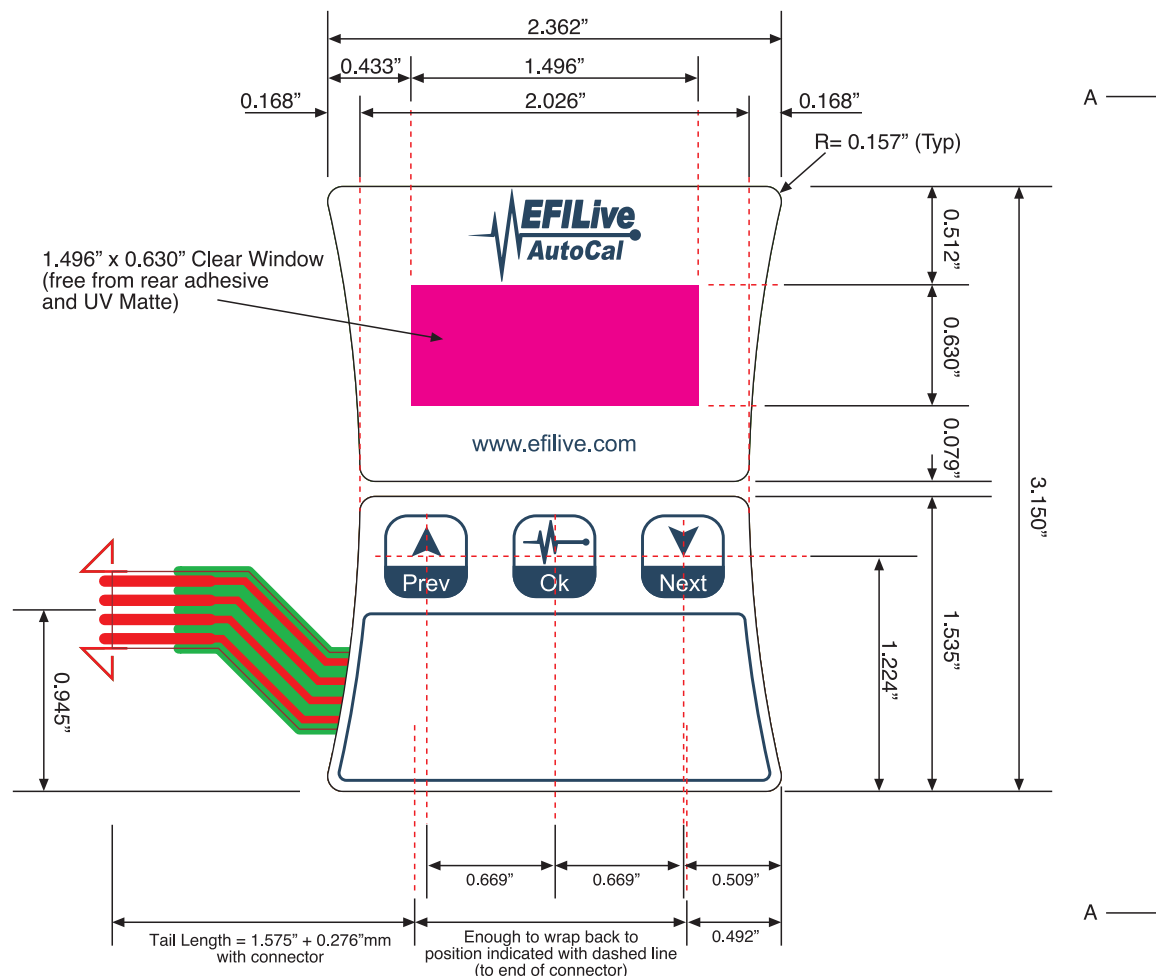


DRAWN BY:	DATE:	CHECKED	SCALE
RK	25/08/06		100%
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES			
TOLERANCE $\pm 0.010"$ UNLESS SPECIFIED			
3RD ANGLE PROJECTION			
MATERIAL			APP
NOTED			DATE
NAME	Nautech		TAB 505754
PART No.	Autocal-Keypad		Page 1 of 2

DATE	ISS	REVISIONS	DR.	CK
25/08/06	0	RELEASED FOR PRODUCTION	RK	


- CIRCUIT SHOWING
- Conductive Silver 0.039" tracks.
 - Dielectric
 - Exit Point
 - Emboss (Ø0.311" to match Domes)
 - Spacer venting
 - Domes

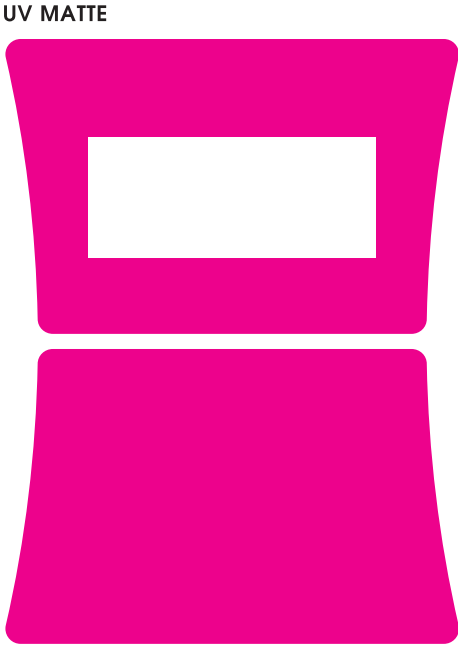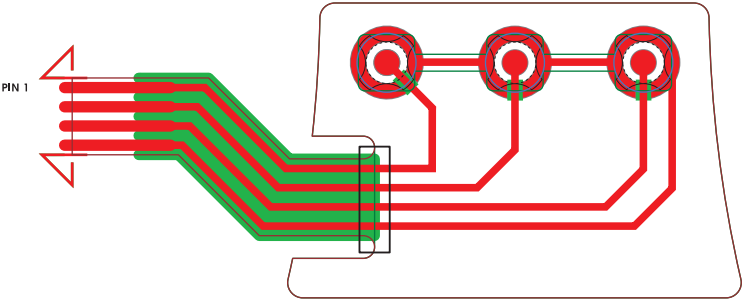


TOP SPACER COMBO TO MATCH OVERALL THICKNESS OF BOTTOM HALF

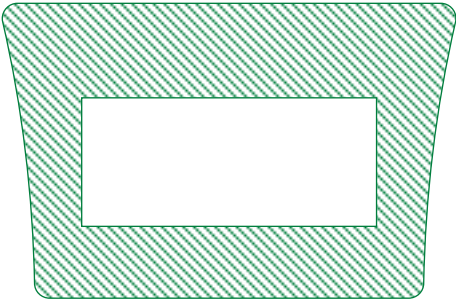

SPACER/REAR ADHESIVE/FILL IN PIECE

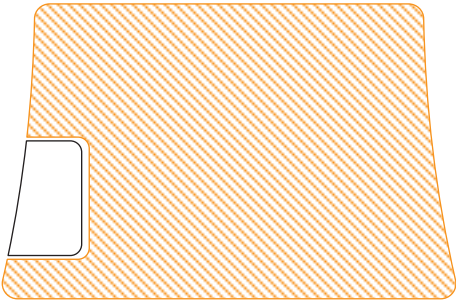

SECTION	DESCRIPTION	TOOL/FILE No.	REF. DIMENSION	SCALE
A				
B				
C				
D				
E				
F				
G				

DRAWN BY:	DATE:	CHECKED	SCALE
RK	25/08/06		100%
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETRES		 3RD ANGLE PROJECTION	
TOLERANCE ± 0.25 UNLESS SPECIFIED			
MATERIAL		APP	
NOTED		DATE	
NAME	Nautech		TAB 505754
PART No.	Autocal-Keypad		Page 2 of 2